




 **GODKENDT
TIL DRIKKEVAND**

vola®



705230 286211

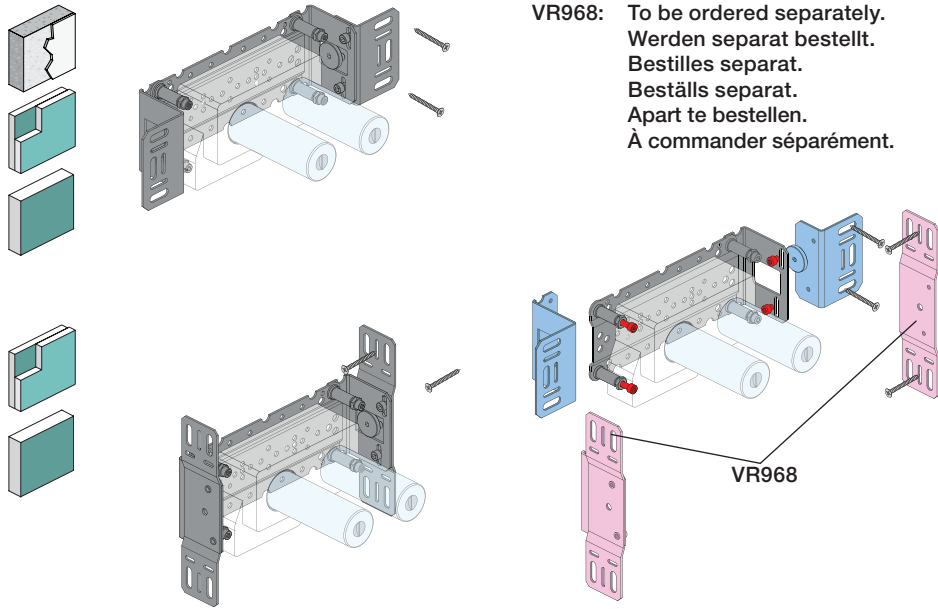
[illegible]

VR968



200M

PEX1

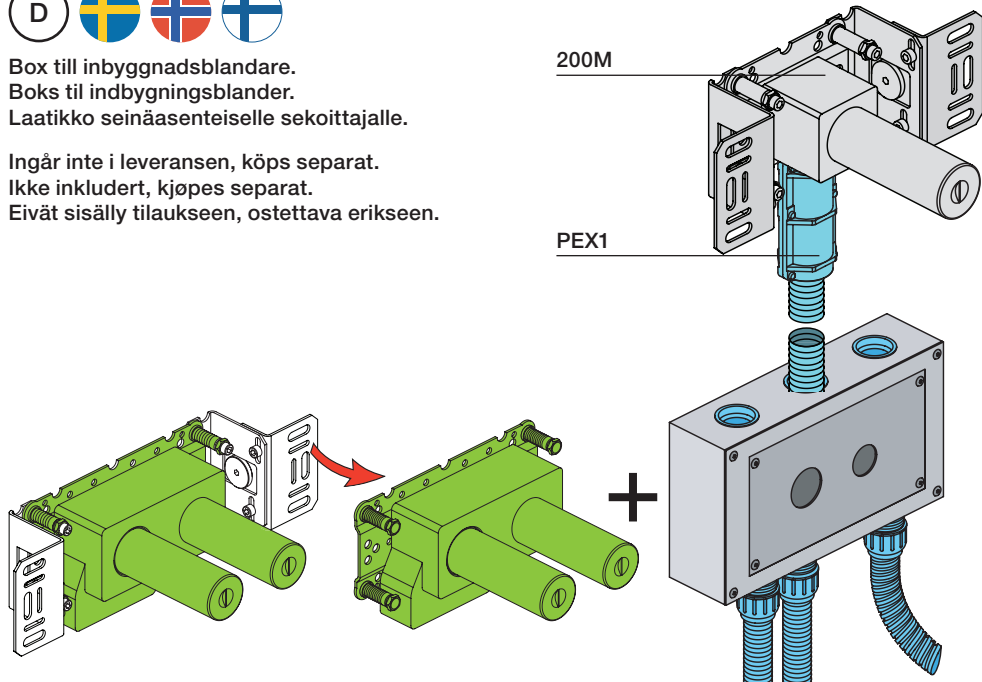

VR1260

VR2260


A diagram of a standard extension cord. The cord is shown in cross-section, with a blue outer jacket and a yellow inner insulation. The yellow section is labeled "EXTENSION" and has a scale from 0 to 50 feet. The blue section is labeled "STANDARD" and has a scale from 0 to 10 feet. A red vertical line marks the end of the standard section. A dimension line labeled "Y" indicates the length of the extension section.

Fitting of extension
Montage von verlängerung
Montering af forlængerdele

VR1260+


VR2260+

VR1020K, VR2019+, VR2119+

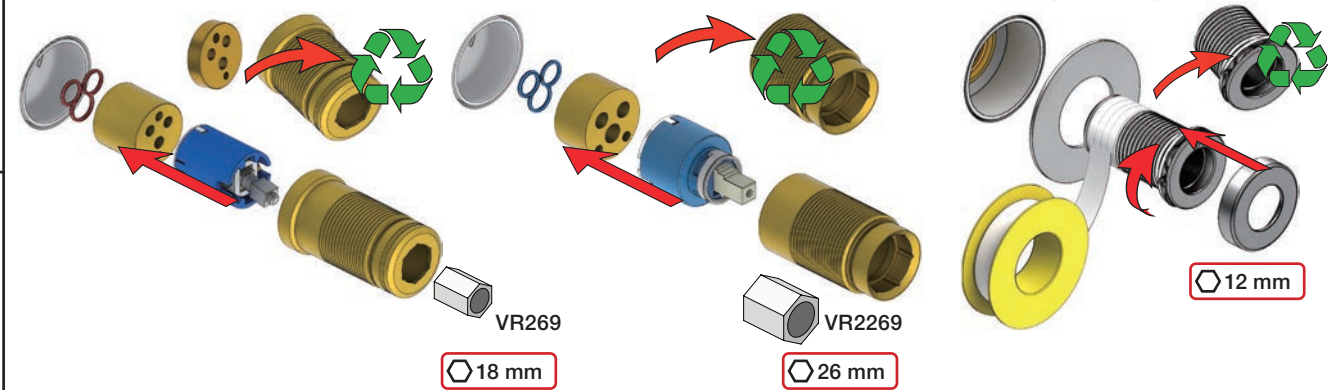

VR1400+


400-2400

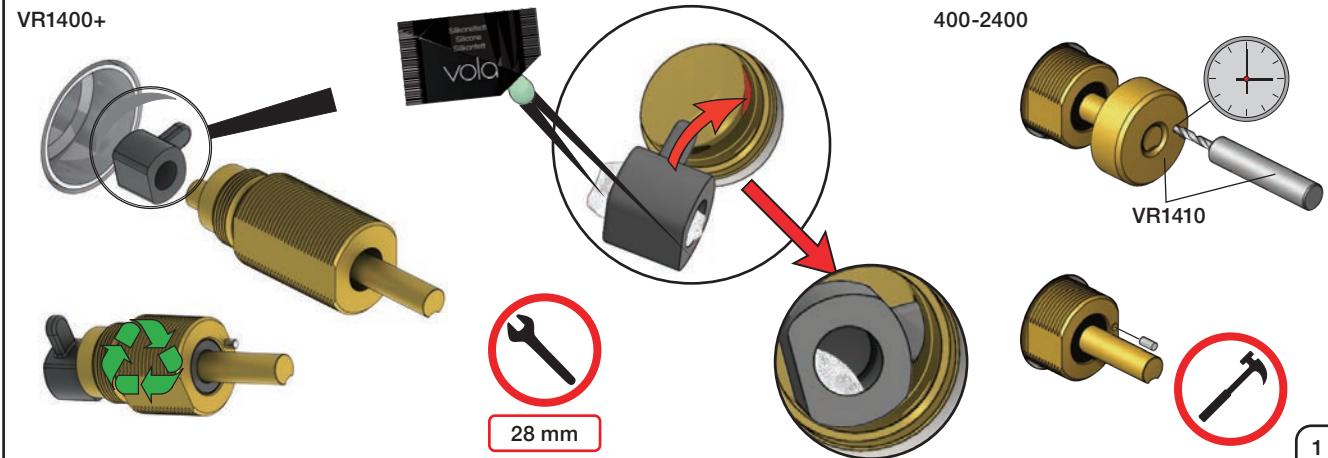

X₅₂ - 0 mm


X_{-15 - 0 mm}

	X	VR2260 + VR1400 + VR1020K
	35 - 47 mm	Std.
	25 - 35 mm	+10
	15 - 25 mm	+20
	5 - 15 mm	+30
	-5 - 5 mm	+40
	-15 - -5 mm	+50

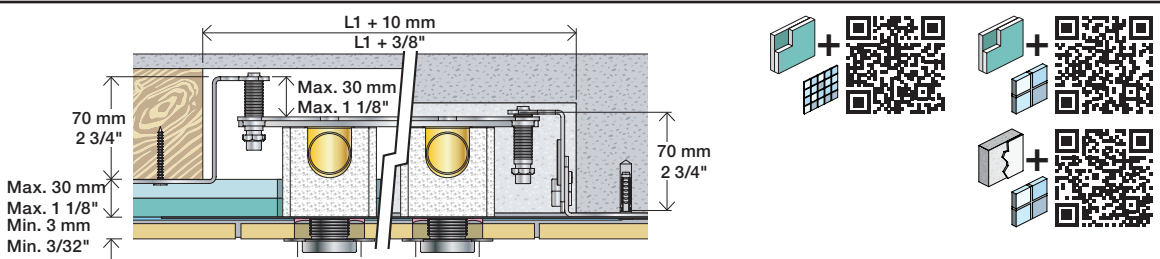

2x13 mm Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère

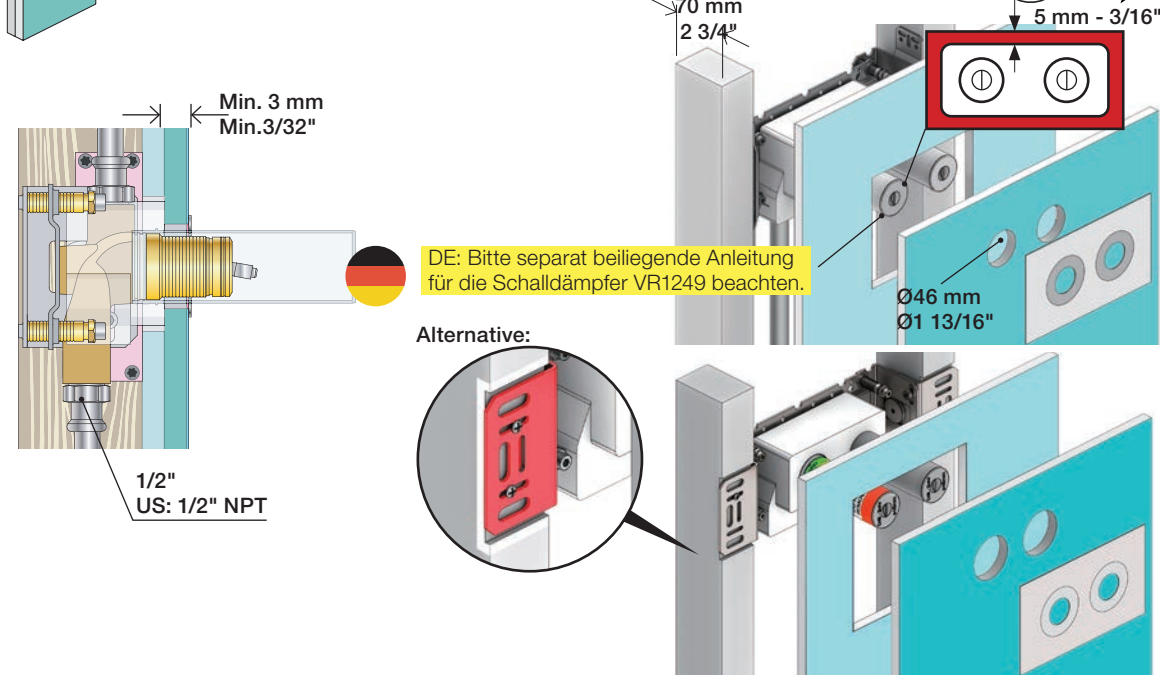


1x15 mm
1x18 mm
1x20 mm

2x13 mm


Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère

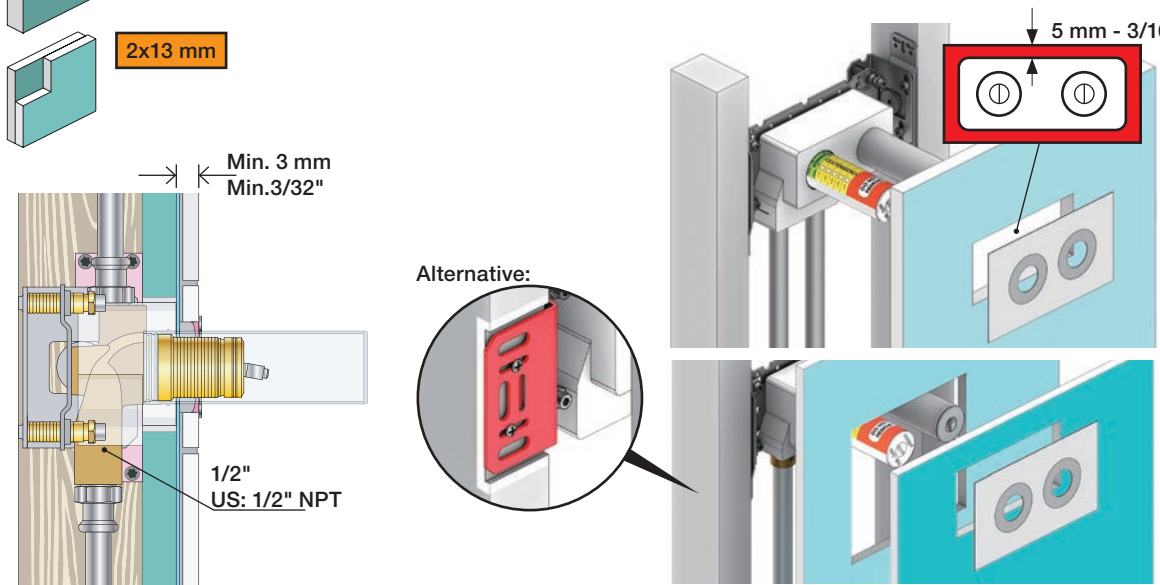

Masonry
Mauerwerk
Murværk

Murverk
Massive wand
Mur Plein

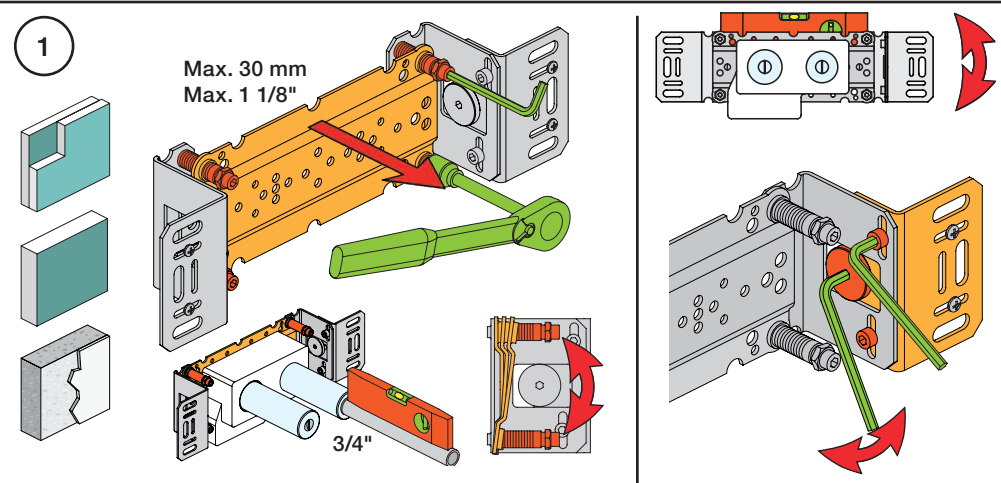








2 Test Pressure
Prüfdruck
testtryk
Test tryck
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera den lokala lagstiftning.
Verifieer de lokale regelgeving.
Vérifiez la législation locale.

1. MAX. 16 Bar 232 Psi


2. MAX. 4 Bar 58 Psi

! Water - Wasser - Vand - Vatten - Water - L'eau
! MAX 1 Minute - Minut - Minuut !

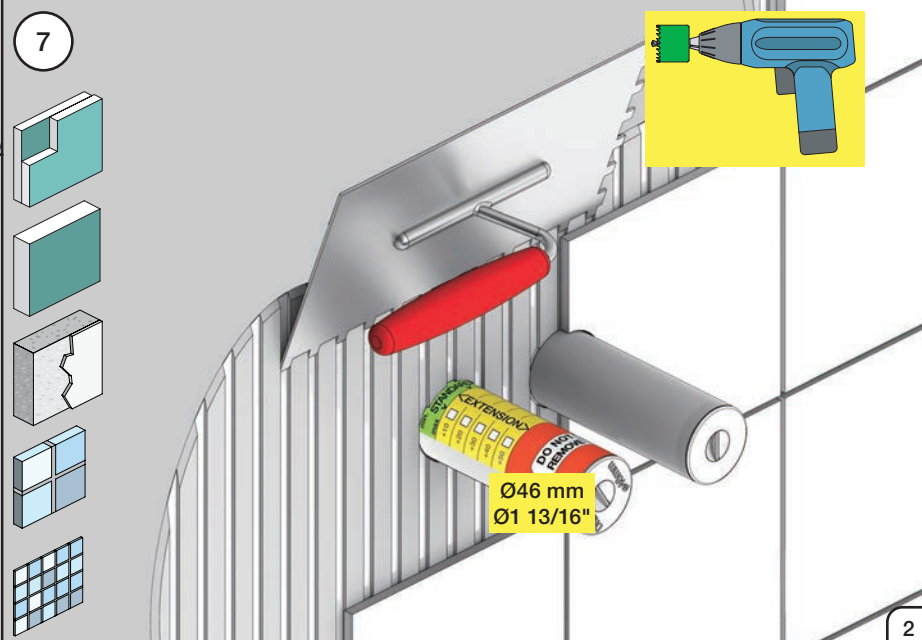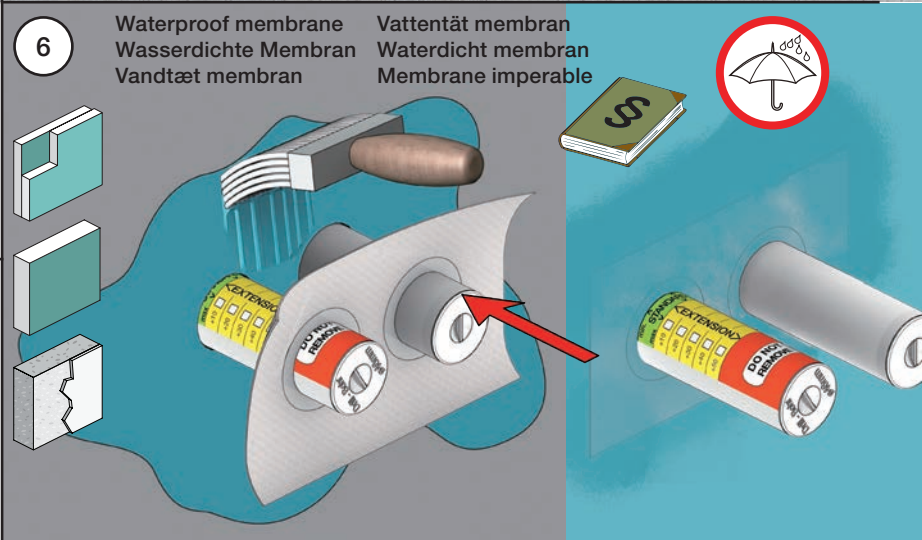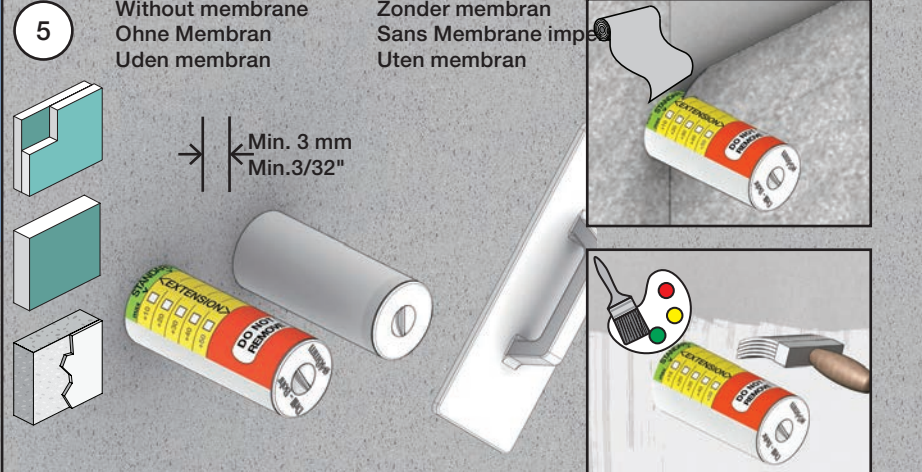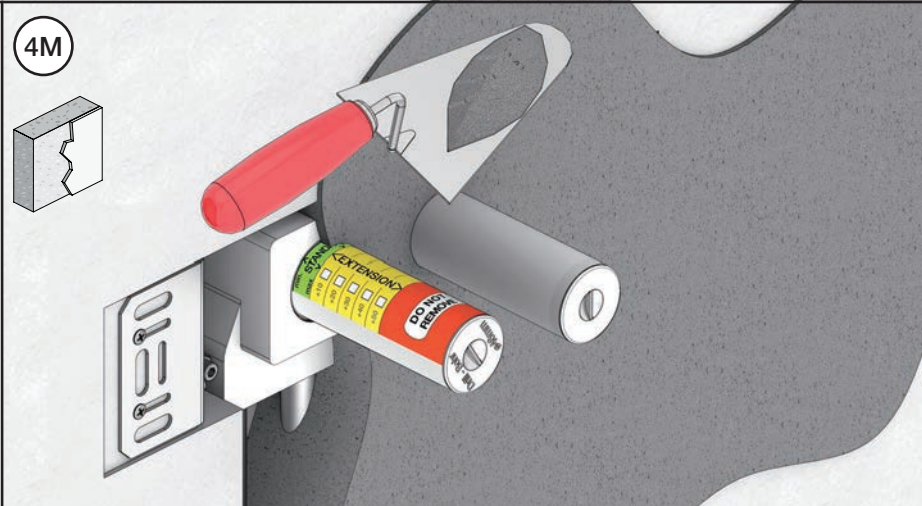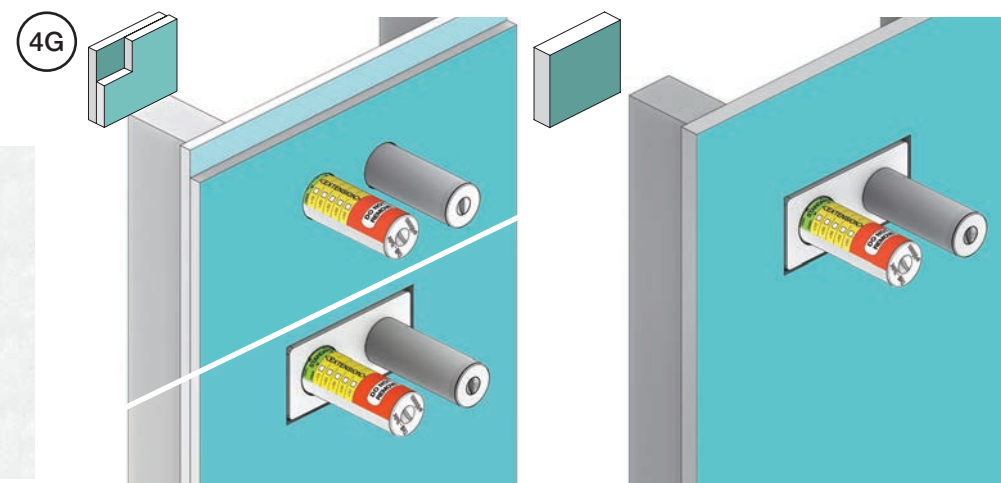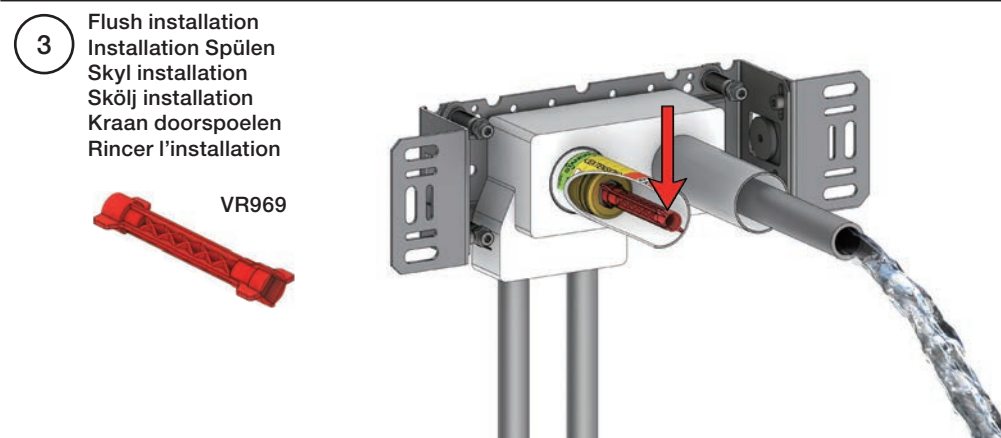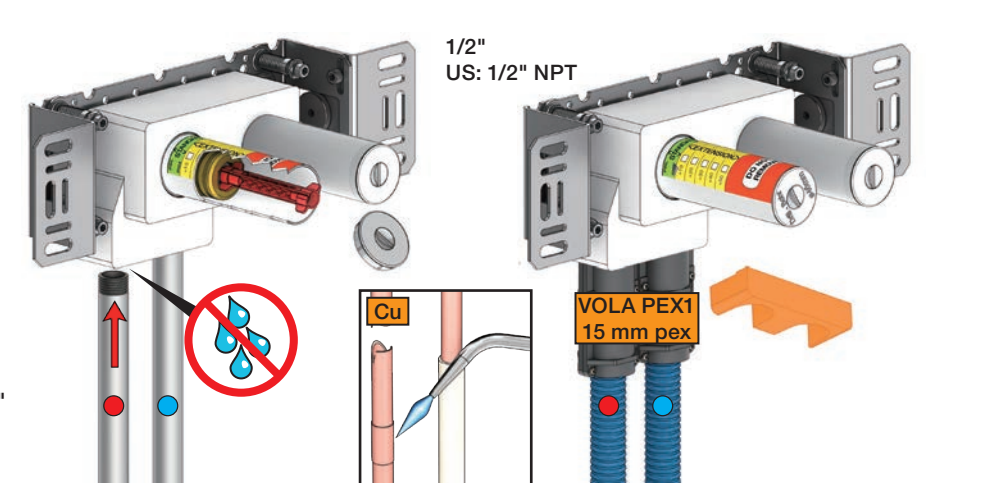

VOLA 070, 070R, 070-HT2


Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage

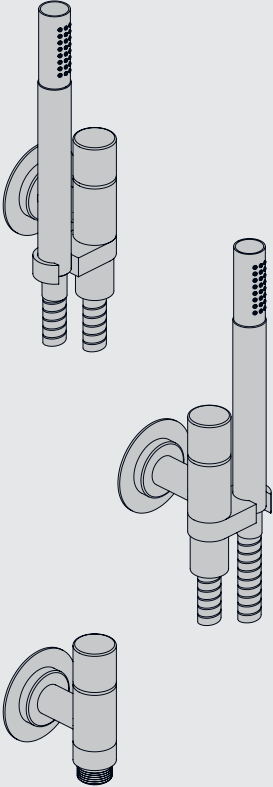



Data	Bar:	1	2	3	4	5
070/070R	(l/min) (Gal/min)	9 2.5	9 2.5	9 2.5	9 2.5	9 2.5
070-HT2	(l/min) (Gal/min)	9 2.5	12 3.2	15 4.0	17 4.5	19 5
	Max. 65°C. 150°F					





VR161:
VR161K: 7 l/min - 1.8 Gal/min (Cal Green)

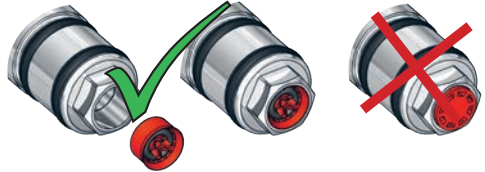


070


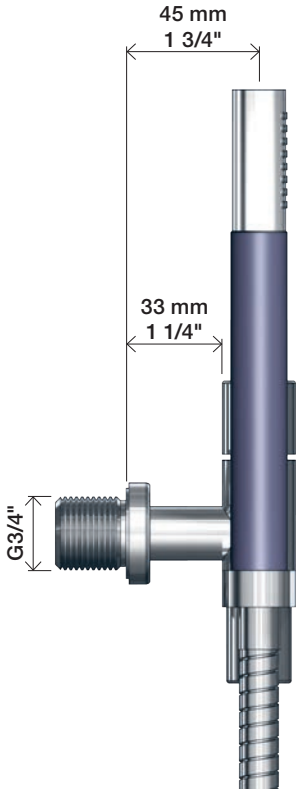
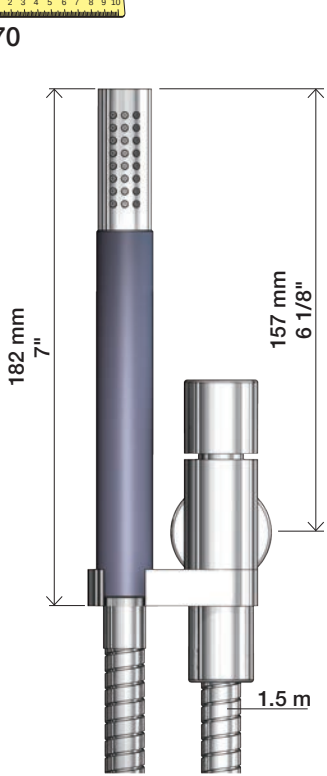


070R

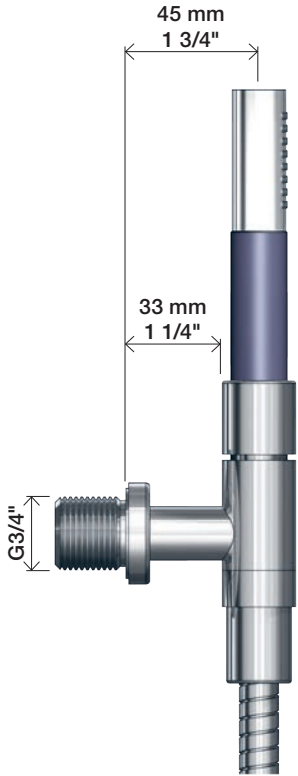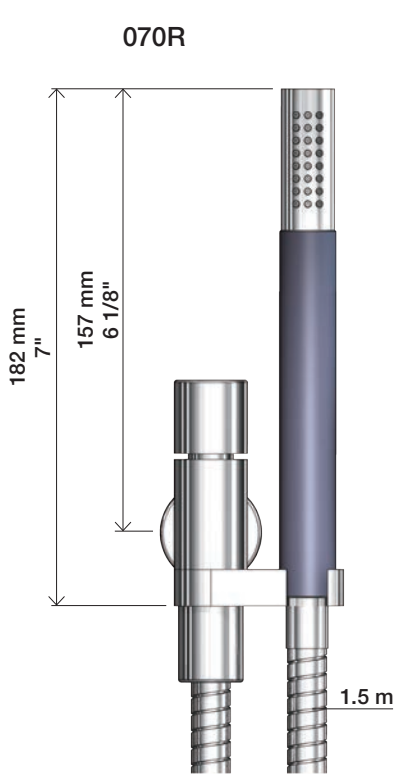

070-HT2

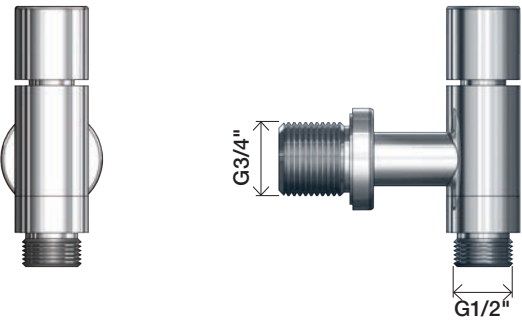

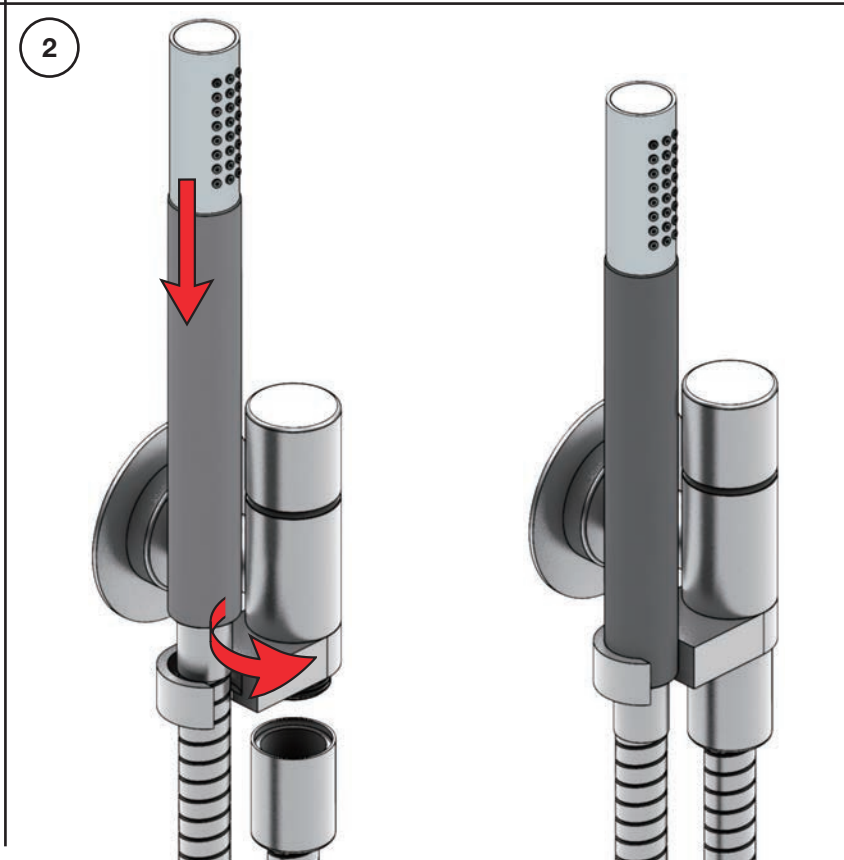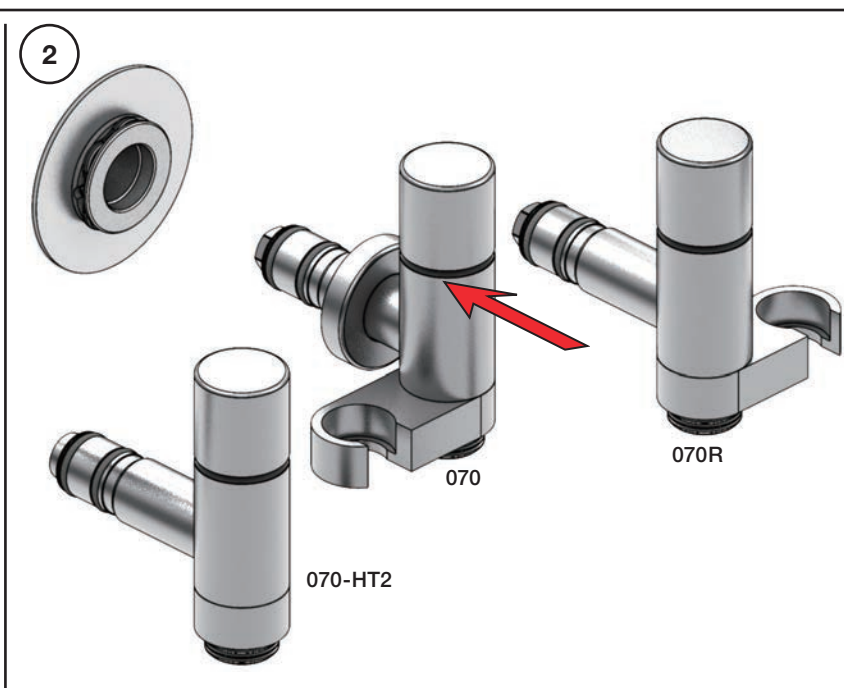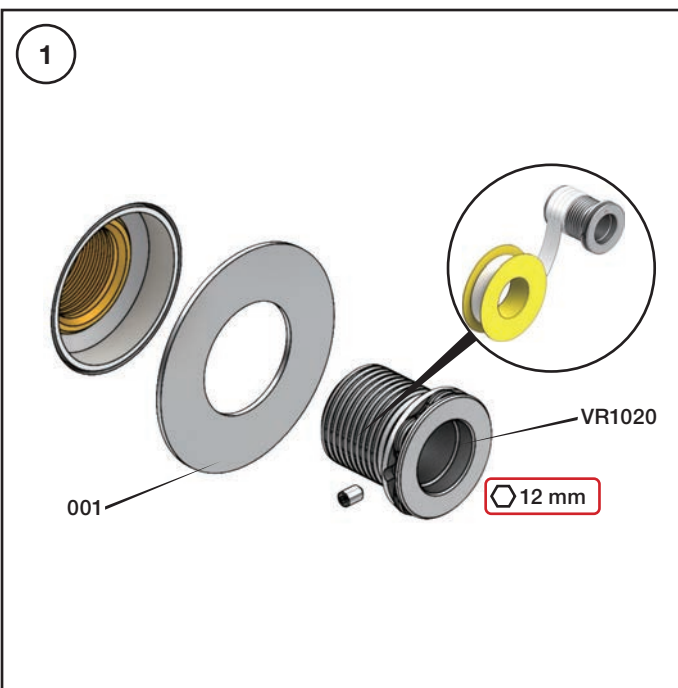


Extension
Verlängerung


Forlængerdele
Förlängning

Verlengstukken
Modification

T Min. 3 mm
Max. 65 mm




Y Min. 48 mm
Max. 110 mm

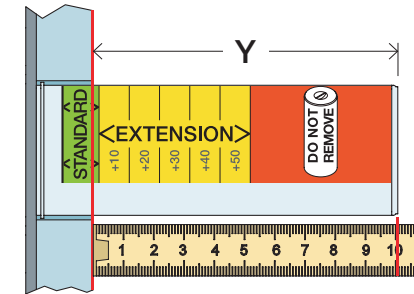


T	Y	VR2019
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50

VR2019+

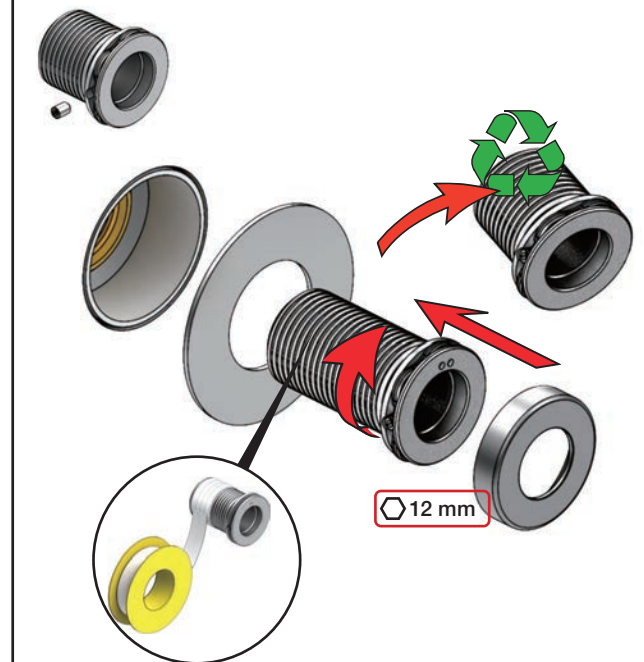


100

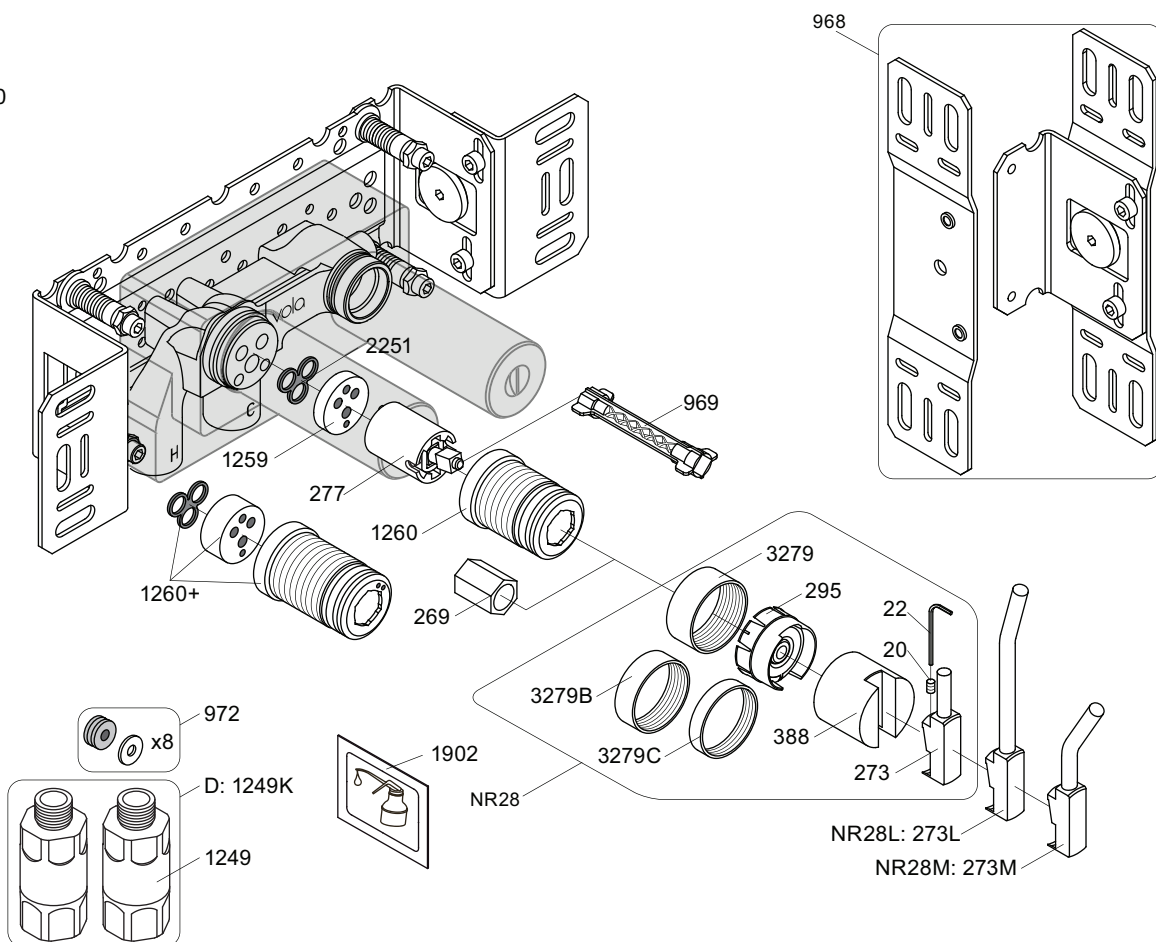


NR28: VR20, VR22, VR269, VR273, VR295, VR388, VR3279, VR3279B, VR3279C
 VR277K: VR22, VR269, VR277
 VR1260: VR1259, VR1260, VR2251


100





100X




200V




300



3002




3003K




3003


-



3002




3001, 001




3001, 001



3001



3001, 001




vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA 100
 100X, 200V, 300


Date
 May. 22

Rev.
 7


Sheet
 SB 1.2

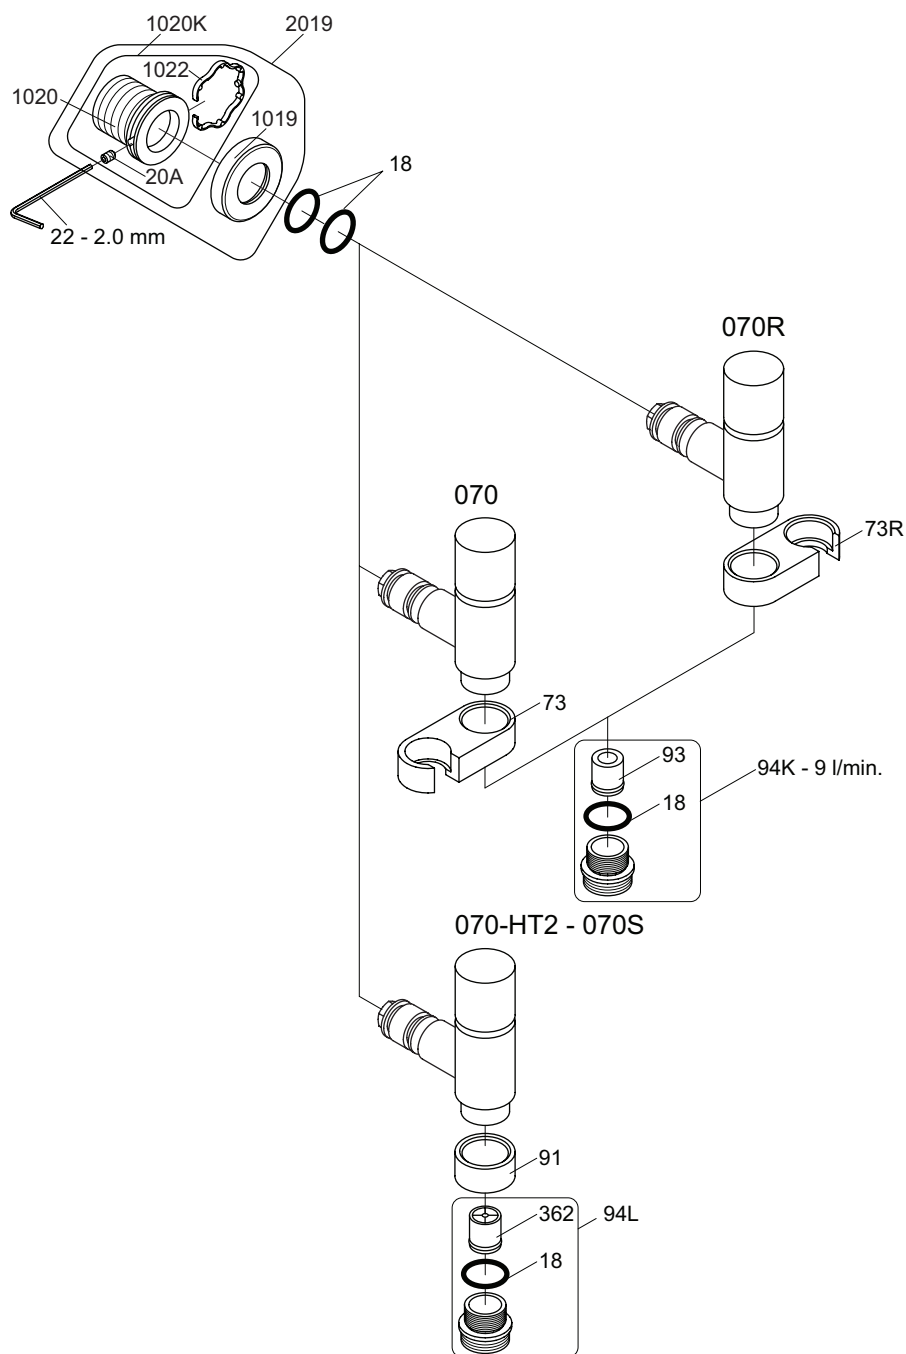


T2



T2V

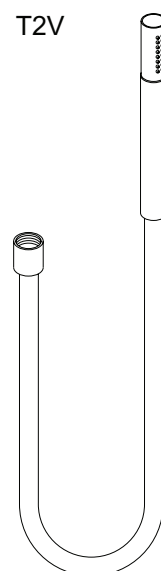

VR1020K: VR20A, VR22, VR1020, VR1022
VR2019: VR20A, VR22, VR1019, VR1020, VR1022



vola

Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

**VOLA 070, 070R
070-HT2**

Date
Apr. 21

Rev.
5

Sheet
SB 16